

START HERE

Instructions



Reaper Revolver


By Dent Reaper® & KECO®




Assembly Manual

Contents:

- Box 1 of 2
 - (1) Upper assembly
 - (1) Lower assembly
 - (4) Z-Bars
 - (2) Out-Riggers
 - (2) Quick-release pins
- Box 2 of 2
 - Revolving tool tray

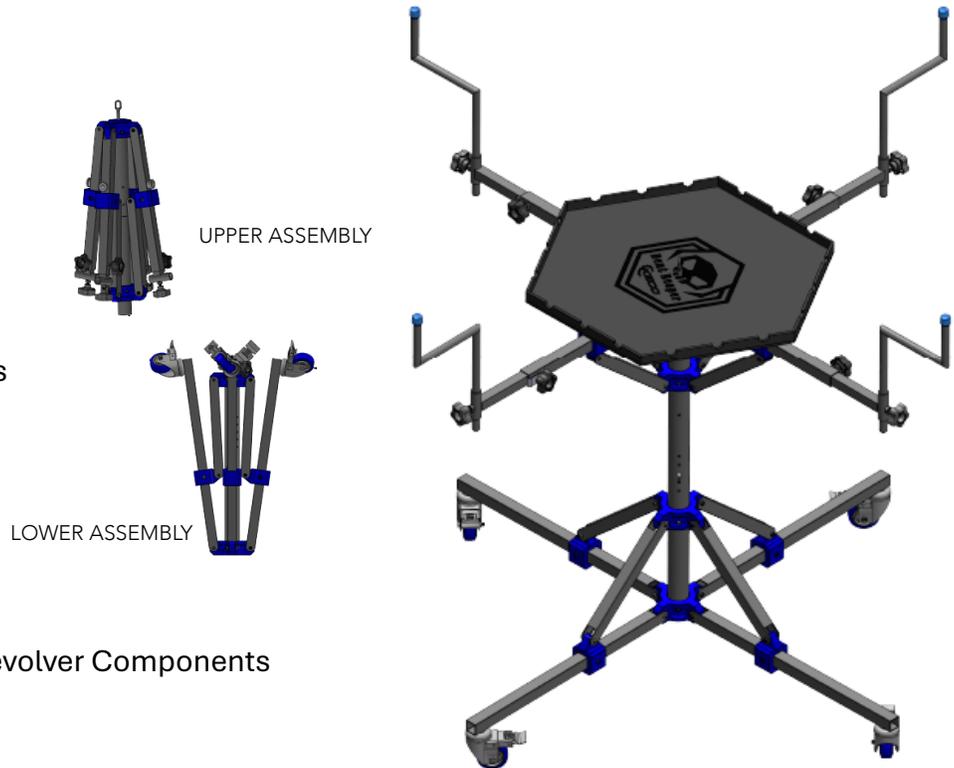

Get familiar with your Reaper Revolver Components

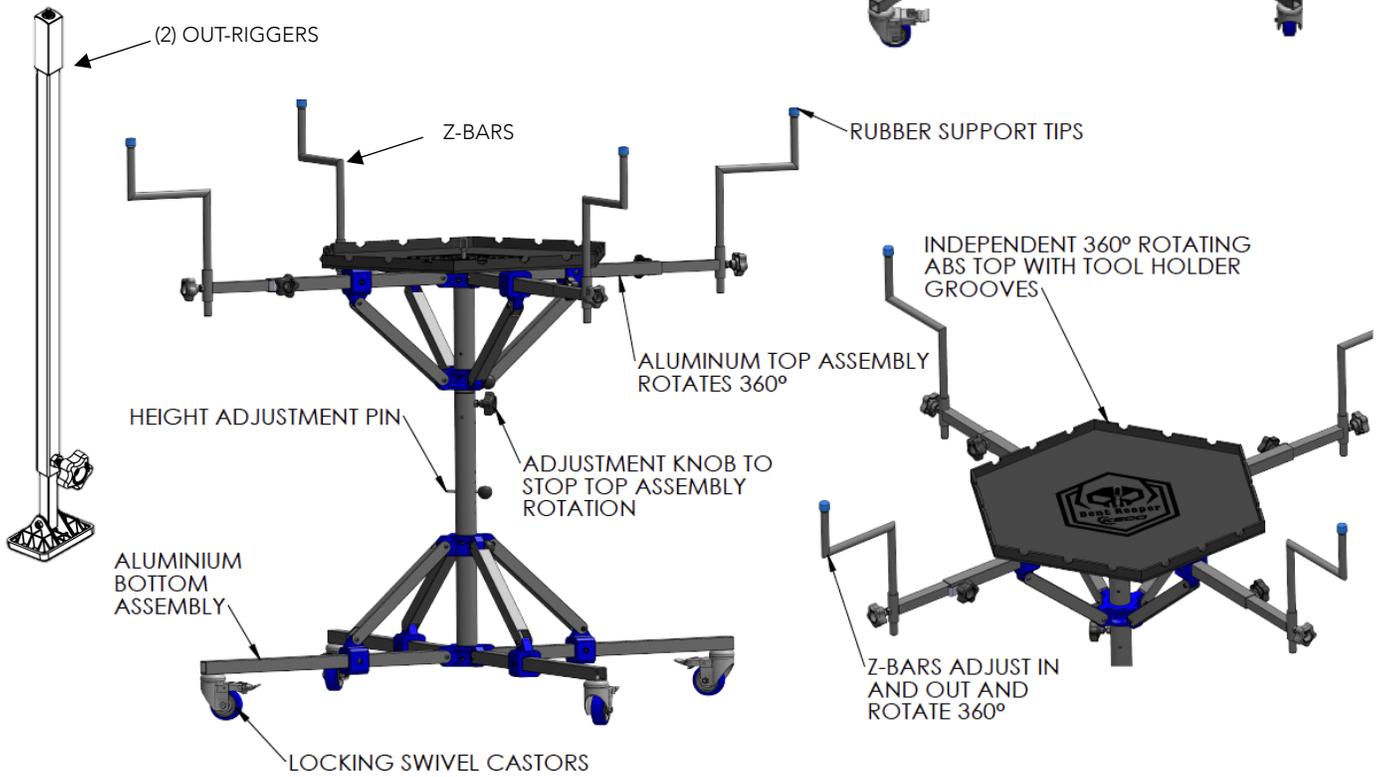


Reaper Revolver

By Dent Reaper® & KECO®




STEP 1:

- a) Open up the lower section of the hood stand by pulling the casters away from the center post.
- b) The center hub (blue) should slide down the post.
- c) Align the hole in the center hub with the bottom hole in the post and insert the quick-release pin.
- d) Install the height adjustment pin in the hole just above the (blue) center hub – this will support the upper section in the next step.
- e) Lock the casters – preventing movement during assembly.

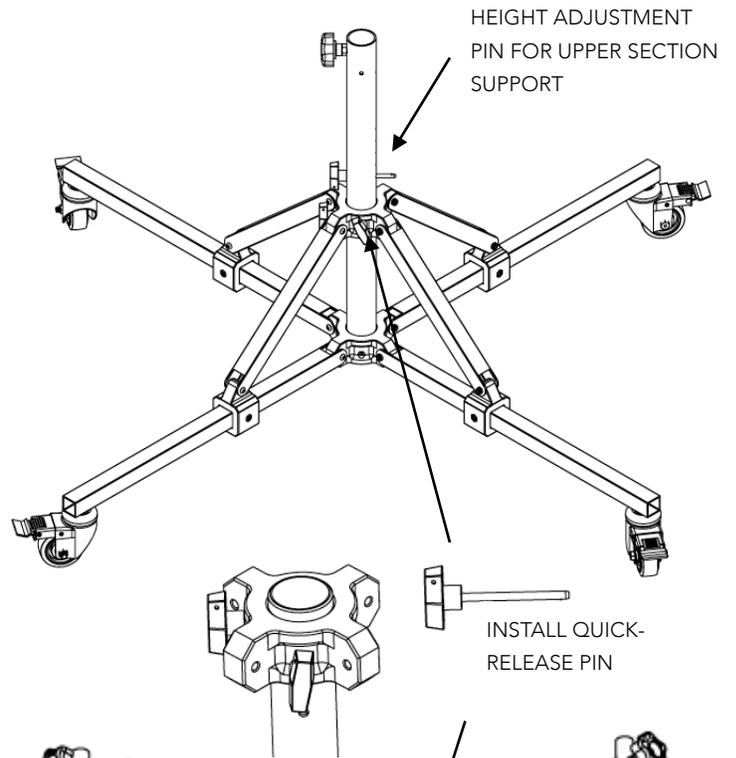

STEP 2:

- a) Open up the upper section of the hood stand by pulling the arms away from the center post.
- b) The center hub (blue) should slide down the post.
- f) Align the hole in the center hub with the hole in the post and insert the quick-release pin.
- g) Turn the upper assembly where the post is pointing down and slide it into the post on the lower assembly – until it contacts the height adjustment pin.

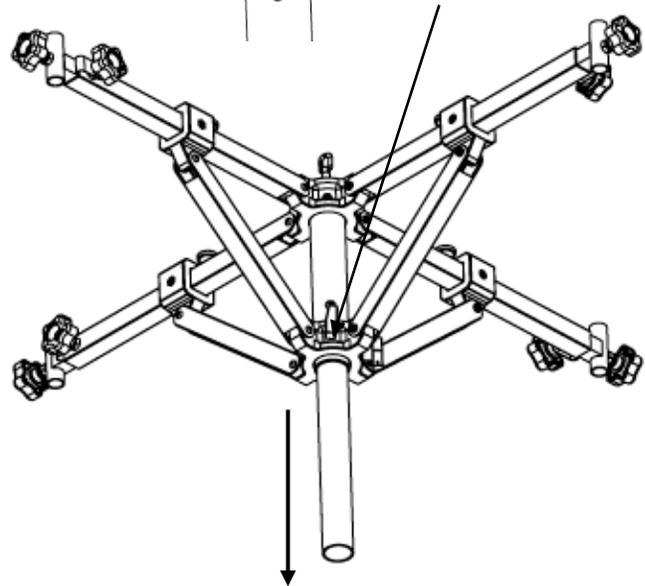


Reaper Revolver

By Dent Reaper® & KECO®



STEP 3:

- Remove the revolving tool tray from Box #2 and place on top of the assembly with the logo up. The eyelet should be showing above the tray.

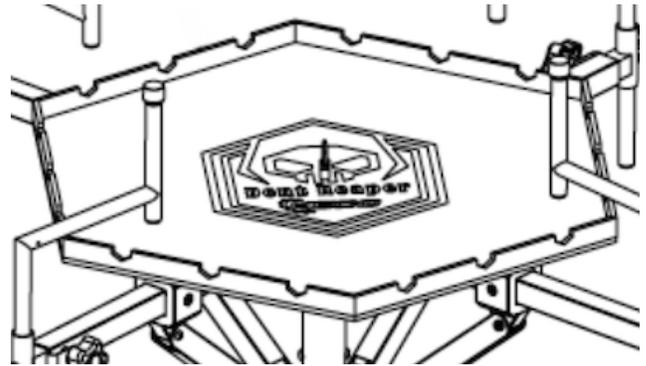

STEP 4:

- Locate the (4) Z-Bars.
- Insert the end through the Z-Bar support.
- Both the support and Z-Bar can be adjusted and secured with the rubber knob(s).

STEP 5:

- Located the (2) Outriggers and thread into the bottom of the desired Z-Bar bottom spinning with the rubber grip.
- Adjust height of the outrigger with the rubber knob for security and support

